



- ▶ Garment lifts
- ▶ Duo Lift Basic 10, Duo Lift 15

Duo Lift Basic 10



- ▶ Connection on both sides
- ▶ Load capacity 10 kg
- ▶ Telescopic width adjustment
- ▶ Optional spacer for bridging door protrusion
- ▶ Garment rail, aluminium, anodized
- ▶ Housing, pivot arm and spacer
Black plastic / aluminium, anodized

Article	Order no.	PU
Duo Lift Basic 600 – 830 mm	9 079 716	1 ea.
Duo Lift Basic 830 – 1150 mm	9 079 720	1 ea.
Spacer, 20 mm	9 079 723	1 ea.

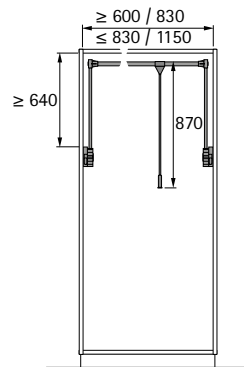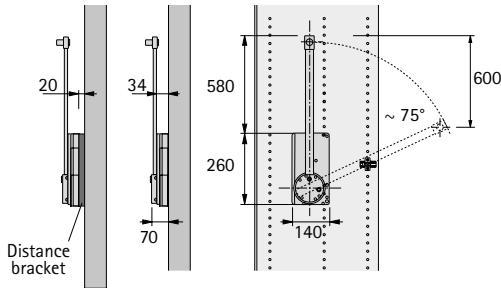

Duo Lift 15



- ▶ Connection on both sides
- ▶ Load capacity 15 kg
- ▶ Telescopic width adjustment for inside carcase widths of 750 - 1150 mm
- ▶ Installation in System 32
- ▶ Special spacing in the housing also permits installation in the area of existing door hinges
- ▶ Optional spacer for bridging door protrusion
- ▶ Garment rail, chrome plated steel
- ▶ Housing, pivot arm and spacer
Plastic / steel, aluminium look

Article	Order no.	PU
Duo Lift 15	0 042 507	1 ea.
Spacer, 20 mm	0 042 509	1 ea.

